# Phenomenological Research and Analysis

Authors:

Edwin C. May, Ph.D., Wanda L. W. Luke, and Nevin D. Lantz, Ph.D.

30 November 1992



Science Applications International Corporation

An Employee-Owned Company

Presented to:

U.S. Government

Contract MDA908-91-C-0037 (Client Private)

Submitted by:

Science Applications International Corporation
Cognitive Sciences Laboratory

# **TABLE OF CONTENTS**

LIST OF	FIGURES	ii
LIST OF	TABLES	. iii
Ţ	OBJECTIVE	. 1
11	INTRODUCTION	. 2
	PROGRESS TO DATE	. 3
III	PROGRESS TO DATE	. 3
	6.1 Basic Research	. 4
	6.2 Data Patterns/Correlations	. 4
	6.3 Applied Research	. 9
	6.4 Theoretical Issues	q
	6.5 Research Methodology	. ,
IV	BIBLIOGRAPHY	12
V	GLOSSARY	16
A DDEN	DIX	17

# LIST OF FIGURES

1	Response threshold (1.196) for target pack 1, coding bit 3	8
ı.	Response infestion (1.11)	٥
2	A two-by-five bit, error correcting block code	,

### **LIST OF TABLES**

1. Visual memabership values for target pack 1	o values for target pack 1
--	----------------------------

### I. OBJECTIVE

The objective of this document is to provide an interim technical report on tasks 6.2, "Basic Research," 6.3, "Applied Research," and 6.4, "Research Methodology," as listed in the 1991 Statement of Work. This report covers the time period from 23 July to 30 November 1992, and includes all subtasks."

<sup>\*</sup> This report constitutes the fifth and sixth deliverable DI-MISC-80508 under contract number MDA908-91-C-0037.

Approved For Release 2000/08/08: CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

### II. INTRODUCTION

Under Statement of Work items 6.2, 6.3, and 6.4 in contract MDA908-91-C-0037, the Cognitive Sciences Laboratory of Science Applications International Corporation is tasked to conduct phenomenological research and analysis. This document details the activity accomplished under these items and constitutes the interim report covering the period from 23 July to 30 November 1992.

### III. PROGRESS TO DATE

This section describes the progress to date for each of the subtasks listed under items 6.2, 6.3, and 6.4 (basic research, applied research, and research methodology, respectively). The section numbering corresponds to the numbering in the Statement of Work.

#### 6.1 Basic Research

#### 6.1.1 Biophysical Measurements

#### 6.1.1.1 MEG and EEG Correlates

We have identified a considerable literature that describes the correlation between MEG and EEG measurements. Since each of these techniques measure different aspects of brain activity, we would expect correlations of some types of measurements and not for other types. Currently, a neuroscientist on our staff is examining the pertinent literature and formulating a comparison for our specific types of MEG/EEG measurements.

#### 6.1.1.2 MEG Data Analysis

We are examining over 800 megabytes of brainwave data from two different analytical perspectives.

- (1) Traditional Event-Related Desynchronization (ERD). A brain indicates that it is inattentive by the production of alpha waves. It is well-known that the brain can be aroused by motor action (e.g., moving a body part such as a finger), cognitive process (e.g., mentally reviewing a word list), and responding to an external stimulus (e.g., direct light flash). One of the brain's indicators of arousal from these activities is called ERD (i.e., alpha power either vanishes or is sharply reduced). Thus, if we can assure ourselves that the stimuli that we used in the MEG experiment constituted a AC stimulus, it would be likely that they also would show an ERD.
  - To search for ERDs in the previous data, we filtered each 2-minute run for alpha activity (i.e., 7-13Hz). As is published in the general ERD literature, we computed the power by squaring each sample point. We performed an ensemble average for 500 milliseconds of prestimulus time and for 1,500 milliseconds of poststimulus period.
  - We are currently examining a variety of normalization techniques so that we will be able to combine the data from run-to-run and across blocks. A combination across blocks of data will allow a very sensitive determination of whether ERDs are seen in the previous data.
- (2) Wavelet Transform. In a recent article, Schiff demonstrated the use of wavelet mathematics to identify transients in non-stationary time series data.\* This technique appears to be straight-forward, and we are currently adapting it to our MEG data.

<sup>\*</sup> Steven. J. Schiff, "Resolving Time-Series Structure with a Controlled Wavelet Transform," Optical Engineering, Vol. 31, No. 11, pp. 2492-2495 (November 1992).

#### 6.2 Data Patterns/Correlations

#### 6.2.1 Sender/No Sender Analysis

We are very sad to report the recent death of Mr. Charles Honorton of the Psychophysical Research Laboratories (PRL). Through the PRL, Mr. Honorton had been subcontracted to conduct a detailed analysis of sender/no sender issues. This analysis was to include statistical evaluation methods and a discussion of the implications regarding target-individual matches. Mr. Honorton was an invaluable contributor to the field of anomalous mental phenomena research and will be greatly missed.

At the time of his death, we were working closely with Mr. Honorton in the analysis of the Ganzfeld data; however, he had not conducted any experimental activity on his subcontract. We are currently discussing the possibility that Dr. Robert Morris of the psychology department at University of Edinburgh will assume the tasks under a separate subcontract.

#### 6.2.2 MEG and EEG Correlates with Anomalous Cognition

We have conduced a detailed literature search for MEG and/or EEG correlates with anomalous mental phenomena, and identified 53 relevant papers, which can be found in the bibliography in Section IV. We are currently examining these papers to provide a mini-meta-analysis on the topic area.

#### 6.3 Applied Research

#### 6.3.1 Long Distance Experiment

The objective of this experiment is to adapt a standard anomalous cognition (AC) experiment to a forced-choice situation. An additional objective is to incorporate fuzzy set technology into a "crisp," two-by-five, error correcting block code to improve AC detection.

#### 6.3.1.1 Background

In the Spring of 1992, SAIC conducted a pilot experiment that was designed to explore the potential for maximizing the reliability of AC responses through objective and rapid analysis. In this study, we reverted to using a dichotomous binary procedure as opposed to a fuzzy set technique. By carefully selecting the dichotomous elements, we could use standard block coding techniques to incorporate complete single-error correction and a few two-fold error corrections as well. We used a message sending motif as a test-bed for this kind of analysis.

Unfortunately, only one receiver demonstrated an effect size larger than 0.20 (i.e., 0.22) for evidence of AC and no evidence of enhanced detection was seen.

One of the primary problems, which may have contributed to this result, was the nature of the target pool. In an attempt to make the targets dichotomous within packs and at the same time inherently interesting, targets within the pool ranged in scale from a panoramic scene of a cityscape to a photograph of three chairs and thus possessed a large variety of potential target elements. Since receivers were told in advance that the targets could contain absolutely any material, they were unable to censor their internal experiences, which may have resulted in enhanced intrinsic receiver noise. We define such a target pool as possessing a large target-pool bandwidth.

Another problem was that each encoding bit in the block code was linked to only one percept (e.g., the single target element of water). This exaggerated the importance of the chosen dichotomous elements. For example, if a receiver failed to sense water in the target but managed to sense most other aspects of

# Approved For Release 2000/08/08: CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

the target regardless of whether they were part of the bit structure, then the block code was not particularly applicable.

In an AC application, a fundamental imbalance exists in this type of bit structure. The block coding assumes that binary zero is "assertive." For example, when water is not indicated in the response, it is equivalent to indicating that water is definitely not in the target. Unfortunately, it is possible or even likely that unless a receiver specifies explicitly that water is not present, then the presence or absence is indeterminate. The net effect is to render this type of discrete block coding invalid for AC applications.

To achieve our second objective (i.e., improved coding procedures), our new experimental protocol attempts to correct the problems discussed above, so that potential enhancement of the detection of AC may be optimized. The following modifications have been made.

- We used the National Geographic static target pool, which has been successful for many AC experiments in the past. This pool appears to include enough basic elements to keep a receiver from guessing, yet allow for some internal self editing to decrease the receiver intrinsic noise (i.e., intermediate target-pool bandwidth).
- The sensitivity to discrete block coding has been reduced by using a number of fuzzy-set elements to define each block coding bit. Thus, each bit will not rely upon a single percept, but rather represent classes of different percepts.

We anticipate that these improvements will allow for a much improved detection of AC, and provide a more sensitive test of whether error-correction can be successfully applied to AC detection.

To achieve our primary objective (i.e., apply AC techniques to a forced-choice circumstance), we used an associative anomalous cognition (AAC) procedure. In this technique, AC targets are assigned one each to a limited set of alternatives. For example, in message sending each of four possible messages are assigned to a different *National Geographic* magazine photograph. In principle, a receiver provides his/her impressions as in a standard AC trial, and if an on-site analyst, who is blind to the target choice, is able to correctly match the response to the intended target, then the message, which was previously associated with that photograph is "received" correctly.

#### 6.3.1.2 Target Construction

To accommodate the error correcting portion of the protocol, we assigned each of the block coding bits to five individual fuzzy set descriptors. These descriptors were developed under another program, but are included here in the Appendix. Each target in the National Geographic pool had been consensus encoded with regard to each descriptor's visual importance to the scene. For example, the element water fall would most likely be coded as a numerical value of one in a close-up photograph of Yellowstone Falls, whereas it might only receive 0.2 for a distant view of Yosemite Falls. These assignments are called membership values in fuzzy set parlance. A collect of membership values for a photograph constitute the fuzzy set representation of the visual content of the scene.

Since the error-correction code that we are using requires us to construct the following four binary numbers: 00000, 01110, 10101, and 11011 (see Figure 2, on page 9), we identified five sets of descriptors for each bit position in the block code word. Each target pack of four photographs possessed their own unique set of 25 descriptors.

Consulting the historical fuzzy set target database, we summed the membership values for the descriptors for each bit position in each of the 20 target packs. Let the sum of the membership values for a given

# Approved For Release 2000/08/08 : CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

bit position be  $\Sigma$ . By inspection, we determined a threshold of 1.5 such that if  $\Sigma \ge 1.5$ , then the bit was defined as one. If  $\Sigma < 1.5$  then the bit was defined as zero. We illustrate the technique for target pack one. Table 1 shows the fuzzy set descriptors and the result of the threshold analysis for the four targets in a pack. For example, target three corresponds to the binary number 10101 (i.e., the shaded cells in Table 1). That is, the sum of the membership values exceed the threshold for bit positions zero, two, and four.

Table 1. Visual membership values for target pack 1.

	isuai memoersini	Visual Membership Value					
Block Bit Position	Descriptor	Target 1	Target 2	Target 3	Target 4		
	Wilderness	0.3		1.0	0.5		
	Urban				0.5		
	Hills		0.1	0.7	0.1		
0	Rocky			0.3	0.5		
	Aligned		0.9		0.5		
	. TOTAL:	0.3	1.0	2.0	2.1		
	BINARY:	0	0	1	1		
	Rise		0.1	0.7	0.8		
	Boundaries		0.7		0.6		
	Closed	-	0.3	0.2	0.3		
1	Settlement		0.8				
	Vegetation		0.9		0.4		
	TOTAL:	0	2.8	0.9	2.1		
	BINARY:	0	1	0	1		
-	Parallel Lines	0.2	0.9				
	Repeat Motif	0.2	0.8	0.2	0.3		
	Striated	0.1	0.6	0.4	0.4		
2	Weathered			0.7			
	Grainy	0.3		0.7	0.1		
	TOTAL:	0.8	2.3	2.0	0.8		
	BINARY:	0	1	1	0		
	Agriculture		0.9		0.2		
	Rectangle	0.5	0.3		0.6		
	Buildings	0.5	0.6		0.7		
3	Agricult. Fields		0.9		0.2		
	Fuzzy		0.5		0.3		
	TOTAL:	1.0	3.2	0	2.0		
	BINARY:	0	1	0	1		

# Approved For Release 2000/08/08 : CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

Table 1. (continued)
Visual membership values for target pack 1.

		Visual Membership Value					
Block Bit Position	Descriptor	Target 1	Target 2	Target 3	Target 4		
	Valley			0.5	0.1		
	Mountains			0.4	0.6		
	Diagonal Lines		0.2	0.6	0.5		
4	Vertical Lines	0.2	0.1		0.4		
7	Horizontal Line	0.3	0.9	0.3	0.2		
	TOTAL:	0.5	1.2	1.8	1.8		
	BINARY:	0	0	1	1		

In this way, four targets were were assigned to the four binary numbers of the block coding scheme for the remaining 19 packs.

#### 6.3.1.3 Target Selection

For each trial in this experiment, a target pack was first selected randomly, and followed by a random selection of a target within the pack.

#### 6.3.1.4 Receiver Selection

Four receivers participated in this experiment. Each was selected on the basis of their significant results from previous AC experiments. All receivers conducted their AC sessions at sites designated by the client and with the aid of a monitor.

#### 6.3.1.5 Number of Trials

Three receivers will contribute a total of four trials each, and one will contribute eight. Thus, 20 trials will be collected for the experiment.

#### 6.3.1.6 Trial Protocol

The following steps are performed for each trial:

- (1) A receiver and a monitor traveled to an east coast location, which was designated by the client. The monitor had a sealed package containing all of the targets from one target pack.
- (2) At a prearranged time, Menlo Park laboratory personnel on the west coast randomly selected a target binary number (i.e., photograph) from the pack and placed it in a designated location. This target remained in the designated location for the duration of a trial.
- (3) For a period lasting no longer than 15 minutes, each receiver wrote and drew his/her impressions of the target.
- (4) The response was collected and secured by the monitor.
- (5) The monitor rank-ordered the four photographs from best to worst match to the response.
- (6) After reporting the rank-order values to the Menlo Park laboratory, the monitor obtained the correct target and provided feedback to the receiver.

#### **6.3.1.7** Analysis

To test the AAC portion of the experiment, the number of first place matches from the rank ordering will be computed for each receiver as well as across all receivers. An exact binomial distribution will be used to compute effect sizes and associated p-values.

To determine if the fuzzy set version of error correction is effective, we must define a response threshold, which is similar to the target threshold, that determines the value of the associated coding bit. Our first approach is to determine the threshold values from empirical data. We examined 160 responses from earlier experiments that used the same target set. Each response from this experiment had been coded using the fuzzy set elements shown in the Appendix. Different from the target coding, each membership value now represented the analysts' belief that each element was indicated in the response. For example, if the response assertively mentioned water, then the water membership value would be 1.0. If the response, however, only showed lines that might be interpreted as waves and water was not mentioned, then the membership value might be 0.6. This value indicates a 60% confidence factor that the response markings really means water.

Figure 1 shows the distribution for the sum of fuzzy set elements that represent coding bit three from target pack one (i.e., see Table 1). The distribution is computed from 160 responses across four different receivers. This curve represents the "natural" bias for the bit-3 elements in responses to the *National Geographic* target pool.

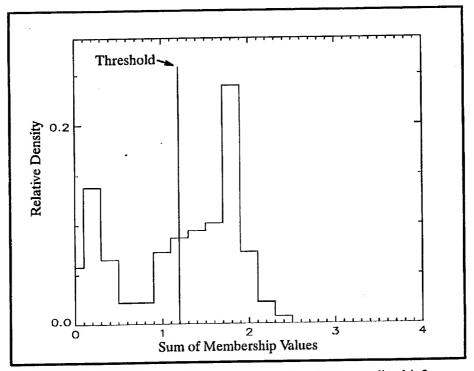


Figure 1. Response threshold (1.196) for target pack 1, coding bit 3.

The threshold of 1.196 is the mean value of this distribution. For bit three to be coded as a one, the sum of the response membership values must equal or exceed this value. Otherwise bit three will be assigned a value of zero. In a similar fashion, a unique threshold value is computed for each bit for each target pack.

## Approved For Release 2000/08/08 : CIA-RDP96-00789R003100230001-2

Phenomenological Research and Analysis: Interim Report

In the fuzzy set analysis, each response is coded by an analyst who is blind to the target choice and unaware of which elements are used to form the coding bits. Membership sums are then computed for each bit and a single 5-bit binary number, which represents the response, is constructed.

Figure 2 shows the decoding matrix, which is specified by the block coding.

00000	01110	10101	11011	} Targets
00001	01111	10100	11010	1
00010	01100	10111	11001	
00100	01010	10001	11111	Single Error
01000	00110	11101	10011	Correction
10000	11110	00101	01011	j
00011	01101	10110	11000	Double Erro
01001	00111	11100	10010	J Correction

Figure 2. A two-by-five bit, error correcting block code.

The analyst must then locate the 5-bit binary number from the fuzzy set analysis within the decoding matrix. The actual target binary number is the one represented by the 5-bit code that tops the column in which the encoded AC response is found. This matrix allows for correction for all single bit errors and a number of two bit errors within the AC response. As in the AAC case, the binomial distribution will be used to compute the effect sizes and related p-values for this approach.

#### 6.3.1.8 Current Status

Data has been collected for the first eight of 20 trials. The remaining trials are scheduled for the third week in December. Analysis of the first eight trials is in progress.

#### 6.4 Theoretical Issues

#### 6.4.1 Anomalous Perturbation

This task has been deleted as per modification P00004.

#### 6.4.2 Models

We have identified approximately 30 articles from the physics literature that bear directly or are associated with a number of potential models of AC. The most promising approach at this time involves aspects of general relativity and quantum gravity. The associated papers are being studied to provide assistance for model construction.

### 6.5 Research Methodology

#### 6.5.1 Committees


We have received responses from three of the five members of the Scientific Oversight Committee on the previous year's work. Those comments are being addressed and will be included in the final report.

0


# Approved For Release 2000/08/08 : CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

The Institutional Review Board did not meet during the reporting period; however, we obtained written permission for the use of humans in the experiment, which is described in Section 6.3.1.

SG1B□

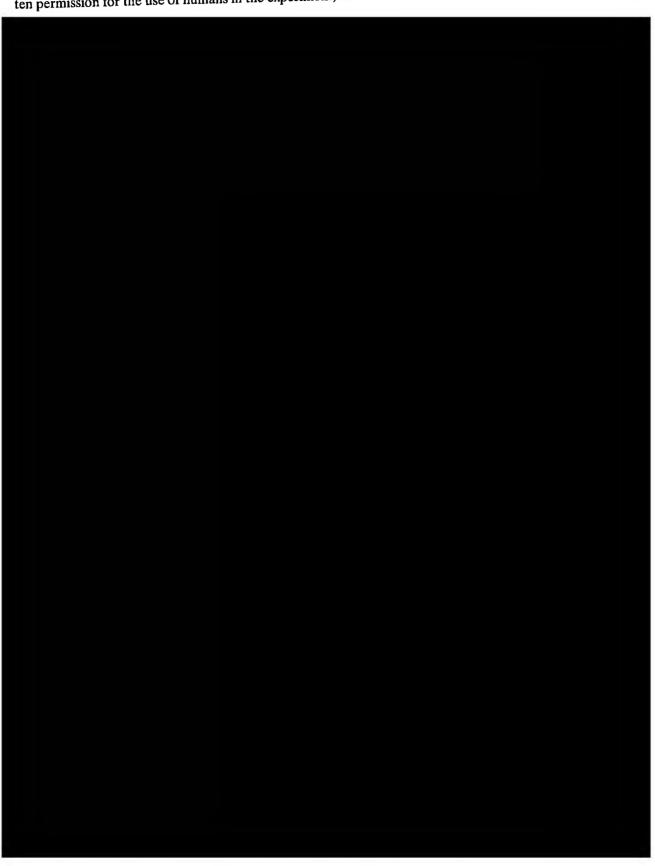

SG1B

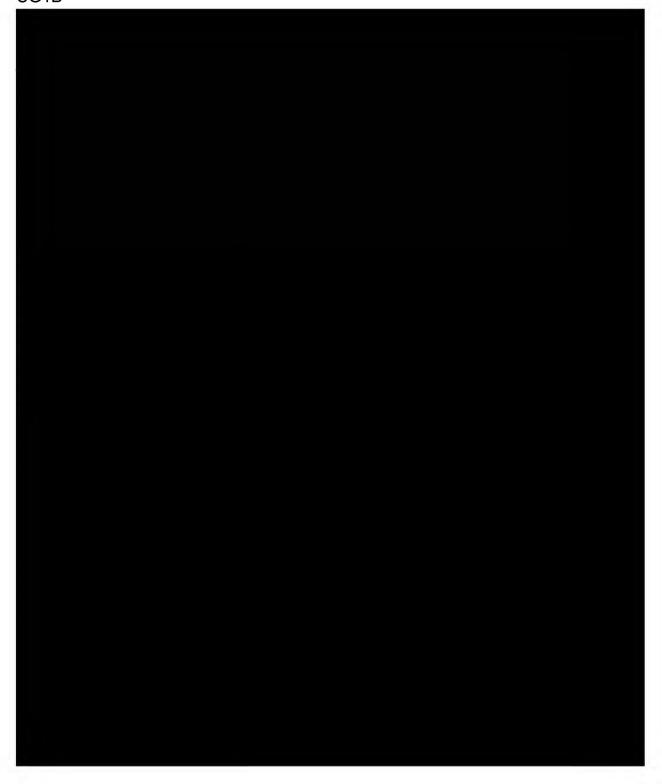

#### IV. BIBLIOGRAPHY

- 1. Hughes, Dureen J., Melville, Norbert T., "Changes in Brainwave Activity During Trance Channeling: A Pilot Study," *Journal of Transpersonal Psychology*, 1990, Vol. 22, No. 2, pp. 175–189.
- 2. Hartwell, J. W., "An Extention to the CNV Study and an Evaluation," European Journal of Parapsychology, 1979 (May), Vol. 2, No. 4, pp. 358-364.
- 3. Bender, Hans, "Hans Berger and an Energetic Theory of Telepathy," Zeitschrift fur Parapsychologie und Grenzgebiete der Psychologie, 1963, Vol. 6, Nos. 2/3, pp. 182-191.
- 4. Whitton, J. L., "Response in the Brain to Telepathic Stimulus," *New Horizons*, 1975 (Jan.), Vol. 1, No. 5, pp. 227-230.
- 5. ?, "Report on Demonstrations and Experiments Performed During the Conference," New Horizons, 1975 (Jan.), Vol. 1, No. 5, pp. 191-194.
- 6. Beloff, John, "ESP: The Search for a Physiological Index," *Journal of the Society for Psychical Research*, 1974 (Sep.), Vol. 47, No. 761, pp. 403-420.
- 7. Bierman, D. J., De Dianna, I. P. F., and Houtkooper, J. M., "Preliminary Report on the Amsterdam Experiments with Matthew Manning," *European Journal of Parapsychology*, 1976 (May), Vol. 1, No. 2, pp. 6-16.
- 8. Casavesio, Orlando, "Electroencephalography of Metaphychical States," Proceedings of the First International Conference of Parapsychological Studies. New York: Parapsychology Foundation, 1955, pp. 127-128.
- 9. Duane, T. D., and Behrendt, R., "Extrasensory Electroencephalographic Induction Between Identical Twins," *Science*, 1965, Vol. 150, No. 3694, p. 367.
- 10. Gertz, John, "Hypnagogic Fantasy, EEG, and Psi Performance in a Single Subject," *Journal of the American Society for Psychical Research*, 1983 (Apr.), Vol. 77, No. 2, pp.155-170.
- 11. Good, I. J., Letter to Journal of Parapsychology, 1961 (Mar.), Vol. 25, No. 1, pp. 57-58.
- 12. Hearne, Keith M. T., "Energy Flow Between Healer and Patient?," Journal of the Society for Psychical Research, 1982 (Oct.), Vol. 51, No. 792, pp. 382-384.
- 13. Hearne, Keith M. T., and Worsley, Alan, Letter to Journal of the Society for Psychical Research, 1980 (Sep.), Vol. 50, No. 785, pp. 489-490.
- 14. Heseltine, G. L., "Electronic Random Number Generator Operation Associated with EEG Activity," *Journal of Parapsychology*, 1977 (Jun.), Vol. 41, No. 2, pp. 103-118.
- 15. Heseltine, G. L., and Mayer-Oakes, S. A. "Electronic Random Number Generator Operation and EEG Activity: Further Studies," *Journal of Parapsychology*, 1978 (Jun.), Vol. 42, No. 2, pp. 123-136.
- 16. Honorton, Charles, "Relationship Between EEG Alpha Activity and ESP Card-Guessing Performance," *Journal of the American Society for Psychical Research*, 1969 (Oct.), Vol. 63, No. 4, pp. 365-374.

# Approved For Release 2000/08/08: CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

- 17. Honorton, Charles, and Carbone, Mildred, "A Preliminary Study of Feedback-Augmented EEG Alpha Activity and ESP Card-Guessing Performance," Journal of the American Society for Psychical Research, 1971 (Jan.), Vol. 65, No. 1, pp. 66-74.
- 18. Houtkooper, J. M., and De Diana, I. P. F., "Relationship Between PK and Physiological Variables in a Gifted Subject," *European Journal of Parapsychology*, 1977 (Nov.), Vol. 2, No. 1, pp. 68-79.
- 19. Hurst, Lewis A., and Neppe, Vernon M., "A Familial Study of Subjective Paranormal Experience in Temporal Lobe Dysfunction Subjects," *Parapsychological Journal of South Africa*, 1981 (Dec.), Vol. 2, No. 2, pp. 56-64.
- Kobayashi, Ken, "A Relationship Between Psi Performance and EEG Alpha Activity of the Cerebral Hemispheres," Ph.D. Thesis, Baylor University, 1976.
- 21. Lloyd, D. H., "Objective Events in the Brain Correlating with Psychic Phenomena," New Horizons, 1973 (Sum.), Vol. 1, No. 2, pp. 69-75.
- 22. Morris, R. L., Roll, W. G., Klein, J., and Wheeler, G., "EEG Patterns and ESP Results in Forced-Choise Experiments with Lalsingh Harribance," Journal of the American Society for Psychical Research, 1972 (Jul), Vol. 66, No. 3, pp.253-268.
- 23. Nelson, Gorden K., and Nappe, Vernon M., "The Neurophysiological Wave Correlates of a Controlled Sample of Subjective Paranormal Experiments A Preliminary Report, Parapsychological Journal of South Africa, 1980 (Jul./Dec.), Vol. 1, No. 2, pp. 99-101.
- 24. Osis, Karlis, and Mitchell, Janet Lee, "Physiological Correlates of Reported Out-of-Body Experiences," Journal of the Society for Psychical Research, 1977 (Jun.), Vol. 49, No. 772, pp. 525-536.
- 25. Owen, A. R. G., "A Preliminary Report on Matthew Manning's Physical Phenomena," New Horizons, 1974 (Jul.), Vol. 1, No. 4, pp. 172-173.
- 26. Paul, Margaret A., Fantl, Kurt, Gardner, Leonard B., and Puharich, Henry K., "Physical and Psychological Factors Involved in Psychokinetic Table-Rapping: Results of a Preliminary Investigation," Zeitschrift fur Parapsychologie und Grenzgebiete der Psychologie, 1963, Vol. 6, Nos. 2/3, pp. 122-146.
- 27. Rao, K. Ramakrishna, and Feola, Jose, "Electrical Activity of the Brain and ESP: An Exploratory Study of Alpha Rhythm and ESP Scoring," *Journal of Indian Psychology*, 1979 (Jul.), Vol. 2, No. 2, pp. 118–133.
- 28. Schmeidler, Gertrude R., "Research Projects in Parapsychology," *Journal of Parapsychology*, 1948 (Jun.), Vol. 12, No. 2, pp. 107-113.
- 29. Schouten, Sybo A., "Autonomic Psychophysiological Reactions to Sensory and Emotive Stimuli in a Psi Experiment," European Journal of Parapsychology, 1976 (May), Vol. 1, No. 2, pp. 57-71.
- 30. Stanford, Rex, G., "EEG Alpha Activity and ESP Performance: A Replicative Study," Journal of the American Society for Psychical Research, 1971 (Apr.), Vol. 65, No. 2, pp. 144-154.
- 31. Stanford, Rex, G., and Lovin, CaroleAnn, "EEG Alpha Activity and ESP Performance," Journal of the American Society for Psychical Research, 1970 (Oct.), Vol. 64, No. 4, pp. 375-384.
- 32. Stanford, Rex, G., and Palmer, John, "Free-Response ESP Performance and Occipital Alpha Rhythms," *Journal of the American Society for Psychical Research*, 1975 (Jul.), Vol. 69, No. 3, pp. 235-243.
- 33. Stanford, Rex, G., and Stanford, Birgit E., "Shifts in EEG Alpha Rhythm as Related to Calling Patterns and ESP Run-Score Variance," *Journal of Parapsychology*, 1969 (Mar.), Vol. 33, No. 1, pp. 39-47.

# Approved For Release 2000/08/08: CIA-RDP96-00789R003100230001-2 Phenomenological Research and Analysis: Interim Report

- 34. Stanford, Rex, G., and Stevenson, Ian, "EEG Correlates of Free-Response GESP in an Individual Subject," *Journal of the American Society for Psychical Research*, 1972 (Oct.), Vol. 66, No. 4, pp. 357-368.
- 35. Tart, Charles T., "Physiological Correlates of PSI Cognition," International Journal of Parapsychology, 1963 (Aut.), Vol. 5, No. 4, pp. 375-386.
- 36. Tart, Charles T., "A Second Psychophysiological Study of Out-of-the-Body Experiences in a Gifted Subject," *International Journal of Parapsychology*, 1967 (Win.), Vol. 9, No. 4, pp. 251-258.
- 37. Tart, Charles T., "Psychophysiological Study of Out-of-the-Body Experiences in a Selected Subject," *Journal of the American Society for Psychical Research*, 1968 (Jan.), Vol. 62, No. 1, pp. 3-27.
- 38. Ullman, Montague, Krippner, Stanley, and Feldstein, Sol, "Experimentally-Induced Telepathic Dreams: Two Studies Using EEG-REM Monitoring Techniques," *International Journal of Parapsychology*, 1966 (Aut.), Vol. 8. No. 4, pp. 577-603.
- 39. Varvoglis, Mario P., and McCarthy, Donald, "Conscious-Purposive Focus and PK: RNG Activity in Relation to Awareness, Task-Orientation, and Feedback," *Journal of the American Society for Psychical Research*, 1986 (Jan.), Vol. 80, No. 1, pp. 1-29.
- 40. Venturino, Michael, "An Investigation of the Relationship Between Feedback—Augmented EEG Alpha Activity and ESP Performance," Mater of Arts Thesis, State University College of Arts and Science, Geneseo, New York, 1976.
- 41. Venturino, Michael, "An Investigation of the Relationship Between EEG Alpha Activity and ESP Performance," *Journal of the American Society for Psychical Research*, 1978 (Apr.), Vol. 72, No. 2, pp. 141-152.
- 42. Wenger, M. A., Bagchi, B. K., and Anand, B. K., "Voluntary Heart and Pulse Control by Yoga Methods," International Journal of Parapsychology, 1963 (Win.), Vol. 5, No. 1, pp. 25-41.
- 43. West, Donald J., "Experimental Parapsychology in Britain: A Survey of Recent Work," *Journal of Parapsychology*, 1954 (Mar.), Vol. 18, No. 1, pp. 10-30.
- 44. Whitton, Joel L., "Ramp Functions in EEG Power Spectra During Actual or Attempted Paranormal Events," New Horizons, 1974 (Jul.), Vol. 1, No. 4, pp. 174-183.
- 45. Brown, C. C., Fischer, R., Wagman, A. M. I., and Horrom, N., "The EEG in Meditation and Therapeutic Touch Healing," *Journal of Altered States of Consciousness*, 1977-78, Vol. 3, No. 2, pp. 169-180.
- 46. Fahler, Jarl, and Cadoret, Remi J., "ESP Card Tests of College Students with and Without Hypnosis," *Journal of Parapsychology*, 1958 (Jun.), Vol. 22, No. 2, pp.125-136.
- 47. Lorenz, F. W., "Electroencephalogram Experiments with Matthew Manning," In Jeffrey Mishlove (Ed.), A Month With Matthew Manning: Experiences and Experiments in Northern California During May-June 1977, pp. 62-71, San Francisco, Washington Research Center, 1979.
- 48. Maher, Michaeleen, "Correlated Hemisperic Asymmetry in the Sensory and ESP Processing of Emotional and Nonemotional Stimuli," *European Journal of Parapsychology*, 1986 (Nov.), Vol. 6, No. 3, pp. 217-257.
- 49. McCreery, Charles, and Price, H. H., "Science, Philosphy and ESP," London: Published for the Institute of Psychophysical Research by Hamish Hamilton, 1969.
- 50. Millay, Jean, "Comment on Lorenz's EEG Experiment," In Jeffrey Mishlove (Ed.), A Month With Matthew Manning: Experiences and Experiments in Northern California During May-June 1977, pp. 72-73, San Francisco, Washington Research Center, 1979.
- 51. Targ, Russell, and Puthoff, Harold, "Information Transmission Under Conditions of Sensory Shielding," Nature, 1974 (Oct. 18), Vol. 252, No. 5476, pp. 602-607.

#### 

- 52. Healy, Joan, "Hippocampal Kindling, Theta Resonance, and PSI," Journal of the Society for Psychical Research, 1986 (Oct.), Vol. 53, No. 805, pp. 486-500.
- 53. Alford, Danny K., "The Origin of Speech in a Deep Structure of PSI," Phoenix: Journal of Transpersonal Anthropology, 1978 (Fall/Win.), Vol. 2, No. 2, pp. 13-18.

#### V. GLOSSARY

Not all the terms defined below are germane to this report, but they are included here for completeness. In a typical anomalous mental phenomena (AMP) task, we define:

- Anomalous Cognition—A form of information transfer in which all known sensorial stimuli are absent. That is, some individuals are able to gain access, by as yet an unknown process, to information that is not available to the known sensorial channels.
- Receiver—An individual who attempts to perceive and report information about a target.
- Agent—An individual who attempts to influence a target system.
- Target—An item that is the focus of an AMP task (e.g., person, place, thing, event).
- Target Designation—A method by which a specific target, against the backdrop of all other possible targets, is identified to the receiver (e.g., geographical coordinates).
- <u>Sender/Beacon</u>—An indivídual who, while receiving direct sensorial stimuli from an intended target, acts as a putative transmitter to the receiver.
- Monitor—An individual who monitors an AC session to facilitate data collection.
- Session—A time period during which AC data are collected.
- Protocol—A template for conducting a structured data collection session.
- Response—Material that is produced during an AC session in response to the intended target.
- Feedback—After a response has been secured, information about the intended target is displayed to the receiver.
- Analyst—An individual who provides a quantitative measure of AC.
- Speciality—A given receiver's ability to be particularly successful with a given class of targets (e.g., people as opposed to buildings).

### **APPENDIX**

**Fuzzy Set Coding Forms** 

CONCRETE DESCRIPTOR LEVELS i  Experiment:  Trial:  Response:  Coder:  Viewer:	SINGLE STRUCTURES SUBSTRUCTURES	fort  castle  mosque  mosque  coliseum (stadium,  amphitheater, arena)	bridge  fidam (lock, spillway)]  10 boats (barges)  11 pier (jetty)  12 [motorized vehicles (cars, trucks, trains)]  13 column  14 spire (minaret, tower)  15 motorized  17 arch  19 wall (e.g., the Great Wall)	
	LEVEL	01	ø	ω

CONCRETE DESCRIPTOR LEVELS II  Trial: Response: Coder: Viewer:	ELEVATION LAND/WATER NO NATER OR VEGETATION AMBIENCE/ INTERFACE VEGETATION FUNCTION	21 port (harbor) 22 [oasis] 23 [oasis] 24 [industrial industrial i	35	46 single peak su coastline su coas
Ö	ELEVATION		* * * * * * * * * * * * * * * * * * *	
	SETTLEMENT		34 muins (incomplete buildings)	44 settlement town (village) 45 city
	LEVEL	7	ø	rv

ABSTRACT DESCRIPTOR LEVELS   Experiment: Trial: Response: Coder: Viewer:		LEVEL COLOR OTHER IMPLIED IMPLIED IMPLIED IMPLIED VISUAL TEXTURE TEMPERATURE MOVEMENT AMBIENCE	still yellow 71 shiny (reflective) 80 smooth 85 mooth 85	ARCHETYPES	STRUCTURE ELEVATION INTERFACE UNIQUENESS AMBIENCE	building(s)  se as well as slope)  104 predominant leature  105 predominant leature  106 predominant leature  107 predominant leature  108 manmade  109 contral)  109 manmade  109 manmade  109 swaths)  109 manmade  109 manmade  100 matural  100 matural
--	--	--	---	------------	---	--

ABSTRACT DESCRIPTOR LEVELS II  Trial: Response: Coder: Viewer:	RECTILINEAR CURVILINEAR MIXED IRREGULAR REPEAT FORMS FORMS MOTIF Tectangle 112 circle (oval, 14 cylinder 117 irregular	sphere) 115 Cone 113 [forus] 115 Cone 116 [hemisphere, dome) 30c.) bch	1-D GEOMETRY	119         stepped         127         arc (curve)         130         meandering curve           120         parallel lines         128         wave form (ripples)         121         wave form (ripples)           121         vertical lines         128         spiral         129         120
--	--	--	--------------	---